

WEIGHT CLASS  
**6 TONNE**  
| TB260 |



POWERFUL  
**COMPACT**  
EXCAVATOR



**TAKEUCHI**  
Japanese for Reliability

# Takeuchi's New 6 tonne Excavator - brings powerful excavating and breakout force in a compact machine size

Takeuchi introduces a 6 tonne (5735kg) category of excavator with the new TB260 a powerful addition for this in-demand weight class.

The TB260 combines all the proven characteristics of Takeuchi excavators - smooth hydraulics, powerful machine performance and good serviceability.

The new model is part of Takeuchi's on-going commitment to machine development, environmental efficiency, operator comfort, safety and improved machine ergonomics.

The new TB260 has plenty of power and greater torque along with a well proven, high performance hydraulic system for greater oil flow for faster cycle times and increased efficiency.



## STAGE V READY

### POWERFUL BREAKOUT FORCE & INCREASED REACH

Powered by a Yanmar 4TNV84T with DPF, to meet Stage V emission regulations. Fuel efficient with automatic idle, dial throttle control with economy work-mode and electronic engine monitoring.

The TB260 features 43.2 kN bucket breakout force and 27.3 kN digging arm force – high power for a 6 tonne excavator.

With a massive ground reach of 6130mm and dig depth of 3895mm the new TB260 offers lots more on site.

### PROTECT YOUR INVESTMENT

The TB260 comes with **TSS Takeuchi Security System** as standard.

- Only programmed keys for start-up
- Un-programmed keys alert the operator via the VDU and alarm
- Standard - 1 red master key and 3 black users keys
- Can programme up to 13 black user keys





## MAXIMUM OPERATING PERFORMANCE

With a track footprint of just 2000 x 2575mm, the new TB260 with its compact size gets maximum accessibility on restricted sites.

Two-speed tracking with auto step down when dozing.

Boom and arm holding valves minimise cylinder drift and helps maintain load control in the event of a hose failure.

The lift alarm can be turned off when not needed but provides an audible warning when the boom is reaching hydraulic lifting capacity.

Automatic idle reduces fuel consumption with less noise and longer engine lifetime.

The auxiliary detent switch prevents less operator fatigue when using continuously operating attachments. Dual proportional control as standard.

A heavy duty dozer (430mm high) with increased operating range comes as standard for efficient on-site finishing and grading with a well protected cylinder.





**BUILT FOR SITE**

The TB260 is built for site, with a strong cast steel wraparound and 100% steel panels. Well positioned hydraulic hoses minimize potential damage and are well protected.

Tough components and heavy duty design adds to durability.

Motion alarms fitted as standard.

Operating attachments is easy and controlled using the variable slider control on the left hand lever.



**NEW** - the TB260 now comes with factory-fitted hydraulic hitch pipework as standard.

Auxiliary flows adjustable from the cab control panel.

Electric throttle control makes it easy to set the throttle to the desired position for operation.

The TB260 now features LED lighting for maximum efficiency, visibility and safety on site.



**REDUCED TAIL SWING**



The compact TB260 features a shorter than average tail swing compared to conventional 6 tonne excavators. Just 1300mm tail swing radius combined with maximum 300mm overhang at 90° to track, rounded corners and enhanced all round visibility, helps minimise potential machine damage in restricted areas.

**RELIABLE TRACK DESIGN**



Triple flange rollers and maintenance free bearings add to tracking performance, built for rough terrain to provide many hours of continuous service.








## MAXIMUM ALL DAY COMFORT WITH A HIGH VISIBILITY CAB

The TB260 has the operator in mind, the large comfortable isolated cab minimises the impact felt. With a sliding 10-way adjustable suspended seat, headrest and ergonomically positioned hand and foot controls, plenty of foot room, high capacity automatic climate control, heater and defrost options.



The TB260 offers operators excellent all round visibility; work lights as standard, a retractable front window with a removable lower window section, a large skylight with sun shade and a rainguard for a dryer working environment.

A well positioned colour visual display unit illuminates active operating switch functions; lift overload, power altitude, auto idle and auxiliary detent. Operators can easily select auxiliary preset modes to match all types of attachments.



## TB260 SERVICEABILITY

The new styled engine hood and side cover provide unparalleled access to engine and hydraulic components simplifying all aspects of machine maintenance - all accessible at ground level.

- Well positioned hydraulic and fuel tank gauges and hydraulic control valve
- Easy access electric refuelling pump as standard with auto shut off, stowed in own compartment
- The rear bonnet provides access to the engine service points
- Automatic fuel bleed system

Side-by-side radiator and hydraulic oil cooler ensures fresh cool air reaches each cooler, improving efficiency and component life. The A/C condenser is mounted on a hinged frame - decreasing inspection and cleaning time.



## TFM - TAKEUCHI FLEET MANAGEMENT

Takeuchi Fleet Management (TFM) is designed to help you better manage your fleet and lower your overall operating costs. With TFM monitoring you can check the health of your equipment and prevent costly repairs by keeping track of alerts, hours and much more.


**MINIMISE DOWNTIME** - proactive monitoring increases machine health, reduces risk and keeps machines running.

**REMOTE DIAGNOSTICS** - reduce service trips by remotely capturing run hours and equipment data.

**UTILISATION TRACKING** - make decisions based on actual machine use.

**PROACTIVE MAINTENANCE** - schedule maintenance based on machine hours; saving time, parts and money.




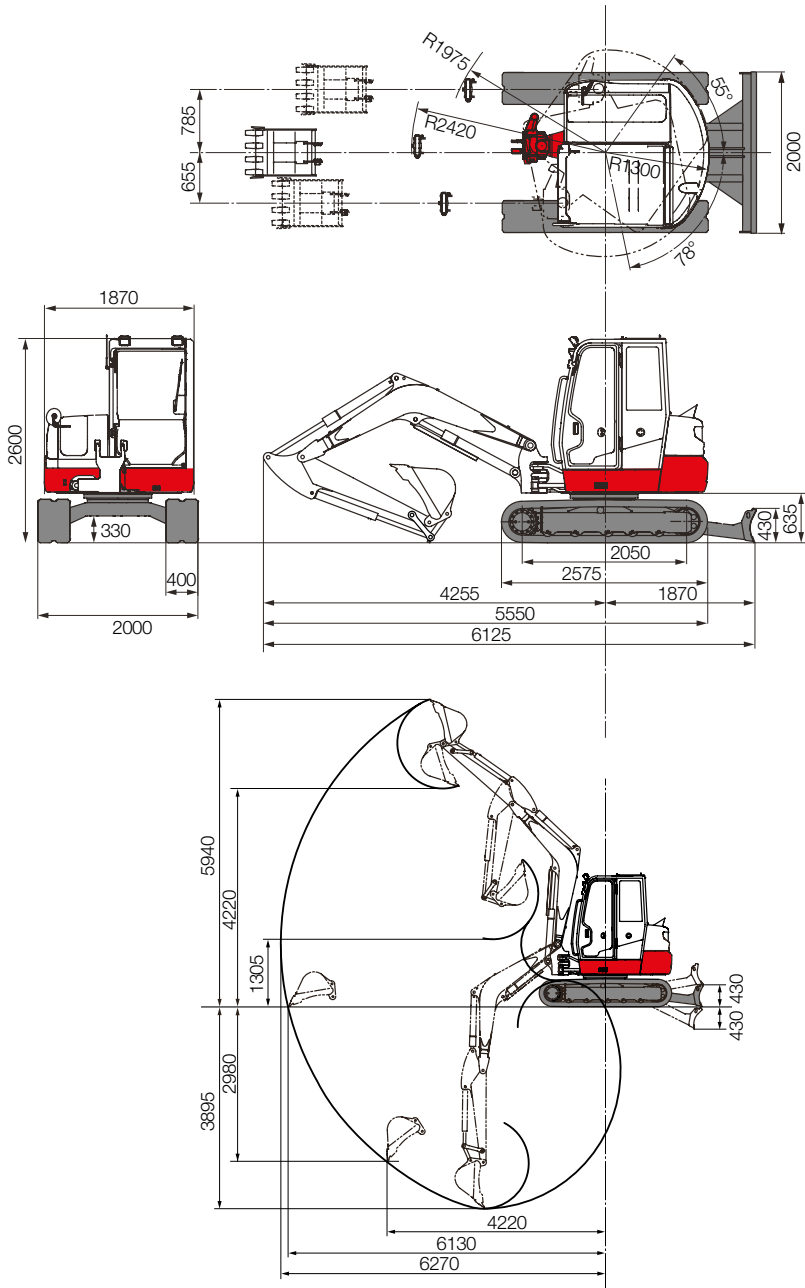

All dimensions unless otherwise stated are in millimetres.

**For more information locally**

call us direct, or contact:



Takeuchi Mfg (UK) Ltd, Unit E2B Kingsway Business Park,  
John Boyd Dunlop Drive, Rochdale, Lancashire OL16 4NG  
Tel: 01706 657 722 Fax: 01706 657 744

Southern Depot at 20 Colthrop Business Park  
Colthrop Lane, Thatcham, Newbury, Berks RG19 4NB  
Tel: 01635 877 196 Fax: 01635 877 195

www.takeuchi-mfg.co.uk Email: sales@takeuchi-mfg.co.uk

## TB260

Standard UK Specification - Long Dipper/Rubber Tracks

| Engine                |                 |
|-----------------------|-----------------|
| Make                  | Yanmar          |
| Model                 | 4TN84T-BPTB DPF |
| Rated Output (kW)/rpm | 34.3 / 2400     |
| Maximum Torque (Nm)   | 160             |
| Cylinders             | 4               |
| Displacement (cc)     | 1995            |
| Electrical System     | 12volts 90amp   |

| Dimensions & Weight          |            |
|------------------------------|------------|
| Operating Weight (kg)        | 5735       |
| Length (Transporting) (mm)   | 5550       |
| Width (mm)                   | 2000       |
| Height (mm)                  | 2600       |
| Ground Clearance (mm)        | 330        |
| Min. Front Swing Radius (mm) | 2420       |
| Slew Radius (mm)             | 1300       |
| Dozer Blade (W x H) (mm)     | 430 x 2000 |

| Operating Information           |      |
|---------------------------------|------|
| Max Digging Depth (mm)          | 3895 |
| Max Dump Height (mm)            | 4220 |
| Max Reach at Ground Level (mm)  | 6130 |
| Max Vertical Digging Depth (mm) | 4220 |
| Max Bucket Digging Force (kN)   | 43.2 |
| Max Arm Digging Force (kN)      | 27.3 |

| Hydraulic System       |                  |
|------------------------|------------------|
| Set Pressure (bar)     | 240              |
| Pump Type              | Rexroth Variable |
| 1st Aux Max Flow l/min | 102              |
| Pressure bar           | 210              |
| 2nd Aux Max Flow l/min | 44               |
| Pressure bar           | 206              |

| Swing System           |                        |
|------------------------|------------------------|
| Boom Swing Angle (L/R) | 78°/55°                |
| Slew Speed (rpm)       | 9.4                    |
| Slew Motor Piston      | Constant Volume Piston |
| Slew Brake             | Wet Friction Plate     |

| Undercarriage              |              |
|----------------------------|--------------|
| Traction Motor             | Axial Piston |
| Traction Drive             | Planetary    |
| Traction Brake             | Disc         |
| Track Width (mm)           | 400          |
| Ground Contact Length (mm) | 2050         |
| Ground Pressure (kPa)      | 31           |
| Travel Speed (K/ph)        | 2.8-4.9      |
| Maximum Gradeability       | 30°          |

| Capacities             |     |
|------------------------|-----|
| Hydraulic System (l)   | 90  |
| Fuel Tank (l)          | 81  |
| Engine Lubrication (l) | 7.4 |
| Cooling System (l)     | 11  |

**OPTIONS:** Steel Tracks, Hydraulic Breaker, Travel Alarm, Hydraulic Quick Hitch.

09/2020

\*Lifting; the mass weight of slings / hitches / bucket to be deducted from the rated load to determine the net load that may be lifted.

Takeuchi machines come with a 2 year/2000 hours warranty as standard. Warranty exceptions to 1 year: fuel injection systems, electrical components, paint work and \*emission control items. (\*applicable models). Before fitment of a hydraulic attachment machine auxiliary pressure and flow should be accurately measured.

In accordance with our established policy of constant improvement, we reserve the right to amend these specifications at any time without notice. Photographs shown may feature non-standard equipment.

**TAKEUCHI**  
Japanese for Reliability